Series PR precision regulators with manual override

Size 1 ports: G1/4
Size 2 ports: G1/4, G3/8

SERIES PR PRECISION REGULATORS

» High precision adjustment

» Multi-diaphragm construction to reach the highest stability

» Adjustment lock

» Compact dimensions

» Removable adjustment knob

The Series PR precision pressure regulators are ideal for applications that require a precise and stable air pressure control. The operating principle using multiple diaphragms allows the Series PR to react to even the smallest pressure variations that may occur during use.

GENERAL DATA

Construction	compact, multi-diaphragm type
Materials	see the following page
Ports	Size 1: G1/4 Size 2: G1/4, G3/8
Mounting	vertical in-line, wall or panel mounting (in any position)
Working temperature	0°C ÷ 50°C
Inlet pressure	0.1 ÷ 12 bar
Outlet pressure	0.05 ÷ 2 bar 0.05 ÷ 4 bar 0.05 ÷ 7 bar 0.05 ÷ 10 bar
Overpressure exhaust	with relieving (standard)
Nominal flow	see FLOW DIAGRAMS on the following pages
Media	filtered and not lubricated compressed air according to DIN ISO 8573-1 Classes 1-3-2
Hysteresis	20mbar
Repeatability	±0.2% FS
Bleed air consumption	≤ 5 l/min

CODING EXAMPLE

PR	1	04	-	M	07

|	
PR	SERIES
1	SIZE: 1 = size 1 2 = size 2
04	PORTS: 04 = G1/4 38 = G3/8 (size 2 only)
M	TYPE OF ADJUSTMENT: M = manual
07	OPERATING PRESSURE (1 bar = 14,5 psi): 02 = 0.05 ÷ 2 bar 04 = 0.05 ÷ 4 bar 07 = 0.05 ÷ 7 bar 00 = 0.05 ÷ 10 bar

Series PR precision regulators - materials
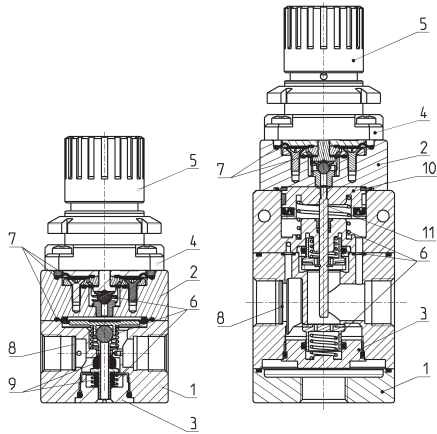
PARTS	MATERIALS
1 = Body	Anodized aluminium
2 = Intermediate body	Aluminium
3 = Valve holder plug	Brass
4 = Bell	Polyamide
5 = Regulator knob	Polyamide
6 = Springs	Stainless steel
7 = Diaphragms	NBR
8= Filters	Stainless steel
9 = Seals	NBR
10 = Piston	Aluminium
11 = Rod	Stainless steel
O-ring	NBR

Products designed for industrial applications.
General terms and conditions for sale are available on www.camozzi.com.

5.15.02
194

Series PR precision regulators - size 1

* to complete the code, add
the OPERATING PRESSURE (see
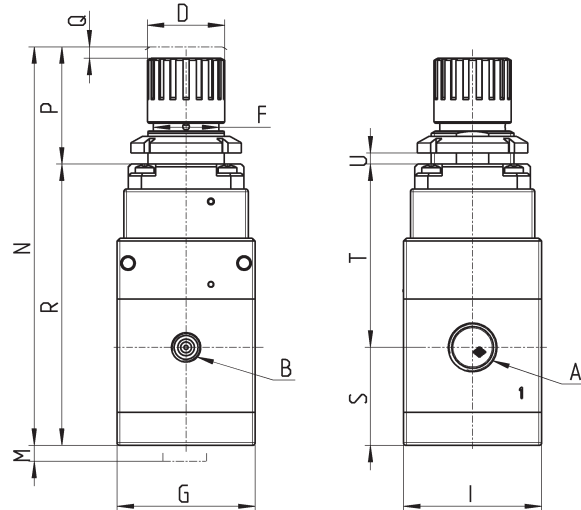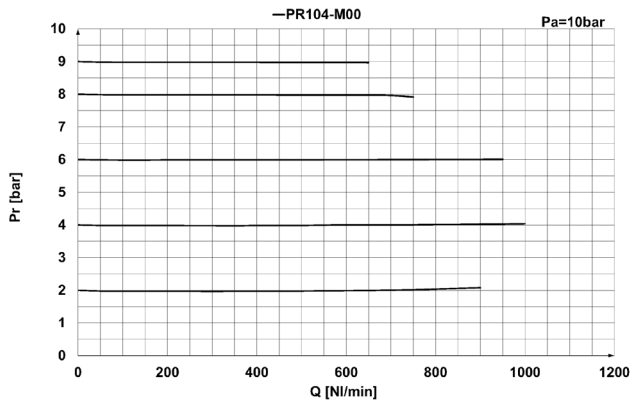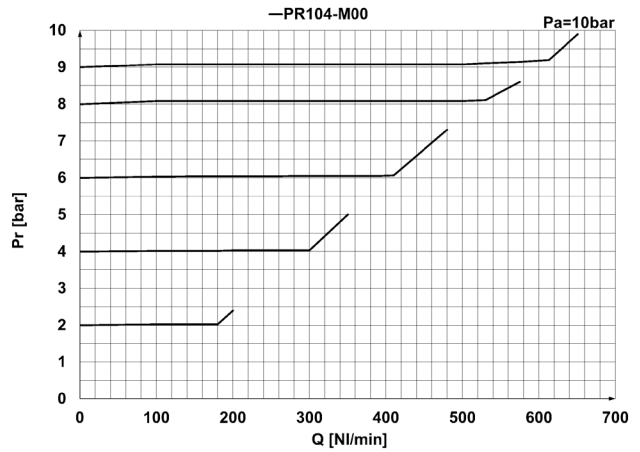the CODING EXAMPLE)

PR02 = Regulator with relieving
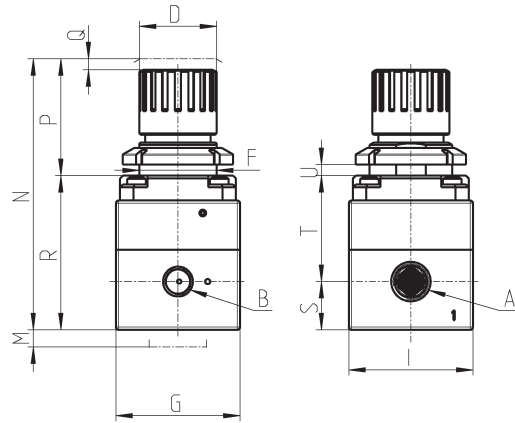
PR02

DIMENSIONS

Mod.	A	B	D	F	G	I	M	N	P	Q	R	S	T	U	Weight (Kg)
PR104-M*	G1/4	G1/8	28	30	45	45	25	96	40	2	56	17.5	38.5	0-6	0.35

Series PR precision regulators - size 2

* to complete the code, add
the OPERATING PRESSURE (see
the CODING EXAMPLE)

PR02 = Regulator with relieving

PR02

DIMENSIONS

Mod.	A	B	D	F	G	I	M	N	P	Q	R	S	T	U	Weight (Kg)
PR204-M*	G1/4	G1/8	28	30	50	50	25	140	40	2	101.8	35.5	66.3	0-6	0.645
PR238-M*	G3/8	G1/8	28	30	50	50	25	140	40	2	101.8	35.5	66.3	0-6	0.645

Products designed for industrial applications.
General terms and conditions for sale are available on www.camozzi.com.

FLOW DIAGRAMS Mod. PR104-M00

—PR104-M00   Pa=10bar

—PR104-M00   Pa=10bar
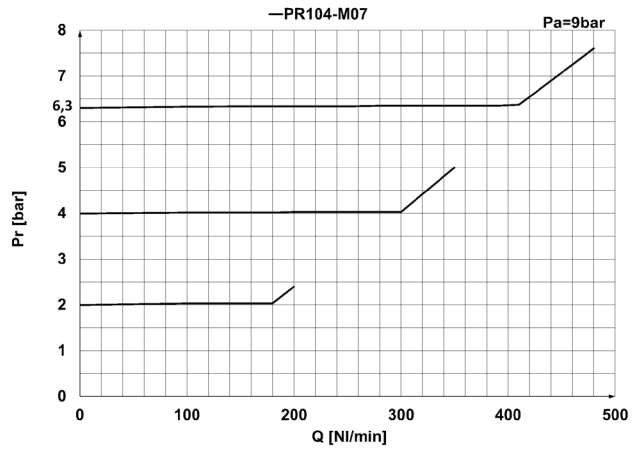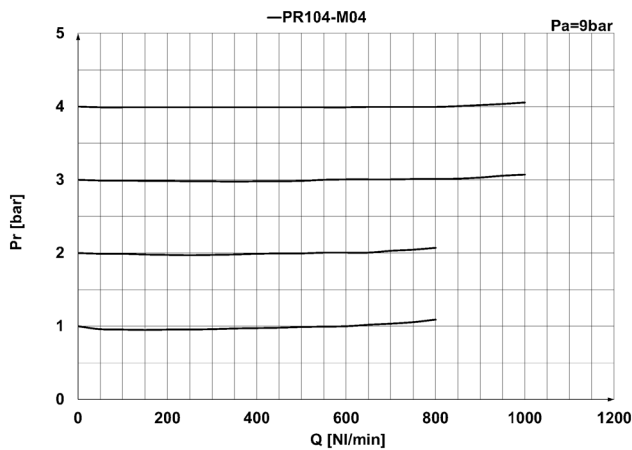
Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

EXHAUST FLOW
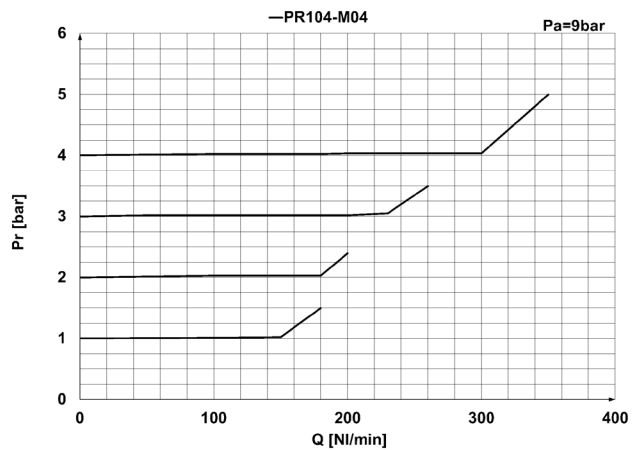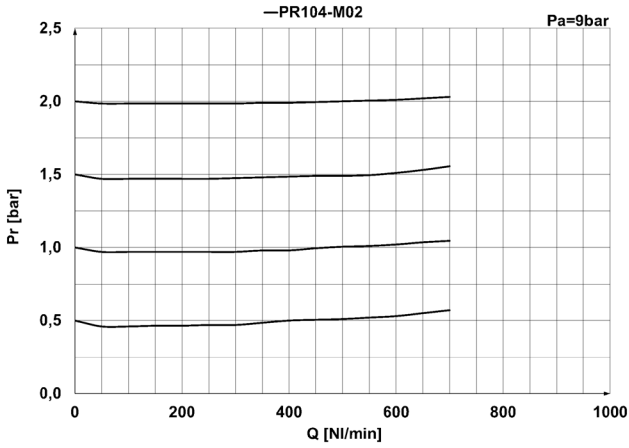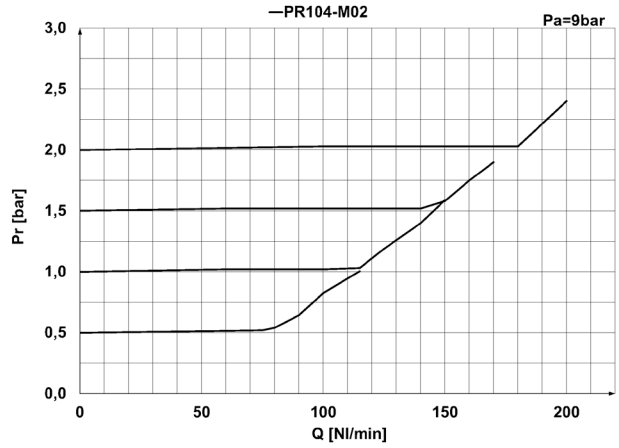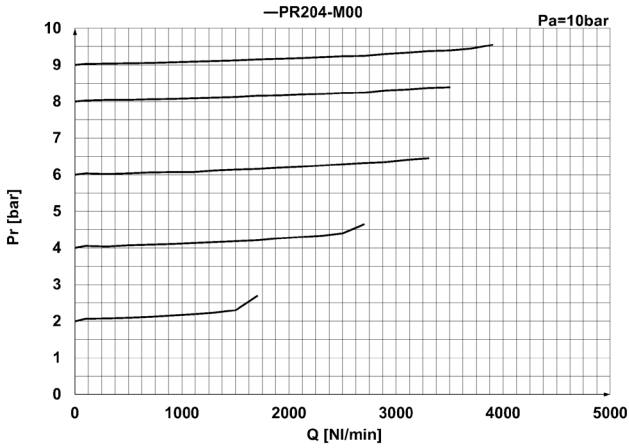Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

FLOW DIAGRAMS Mod. PR104-M07

—PR104-M07   Pa=9bar

—PR104-M07   Pa=9bar

Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

EXHAUST FLOW
Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

FLOW DIAGRAMS Mod. PR104-M04

—PR104-M04   Pa=9bar

—PR104-M04   Pa=9bar

Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

EXHAUST FLOW
Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

Products designed for industrial applications.
General terms and conditions for sale are available on www.camozzi.com.

5.15.04
196

SERIES PR PRECISION REGULATORS
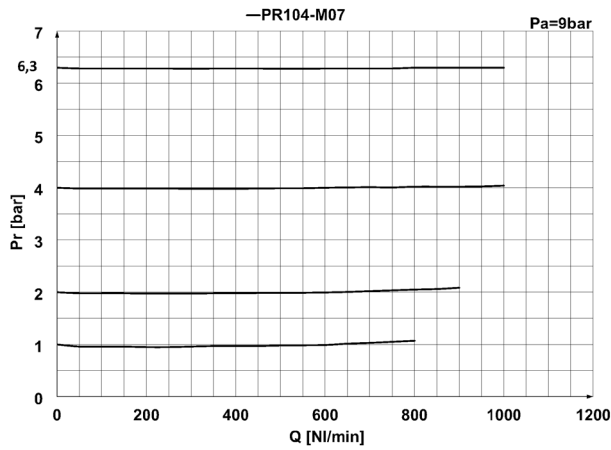
FLOW DIAGRAMS Mod. PR104-M02

Pr = Regulated pressure (bar)
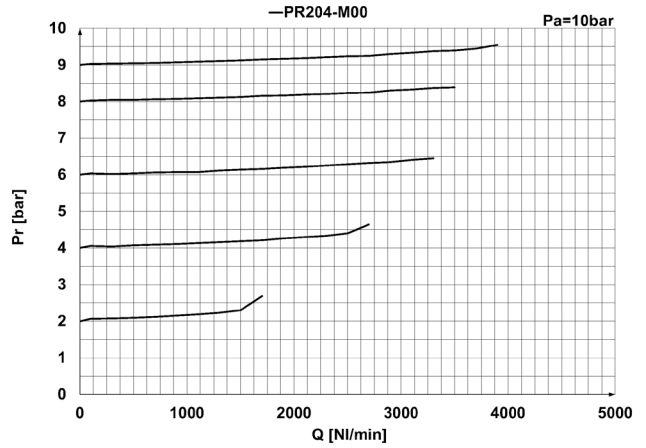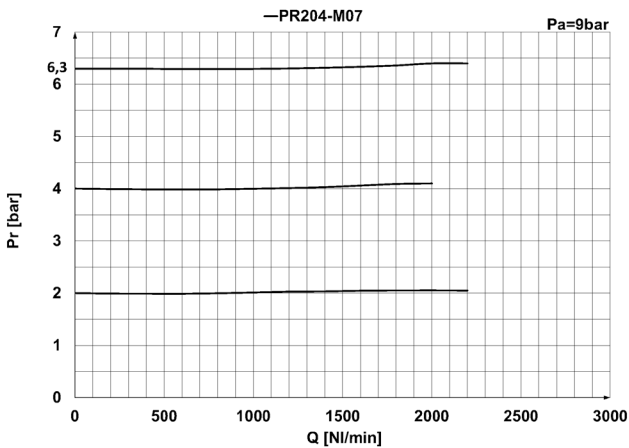Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

EXHAUST FLOW
Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

FLOW DIAGRAMS Mod. PR204-M00

Pr = Regulated pressure (bar)
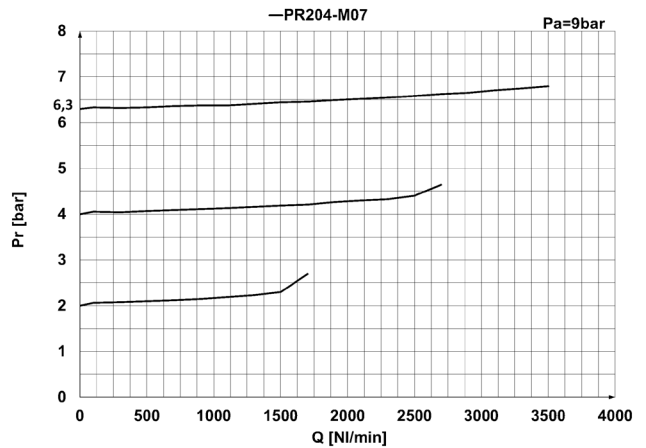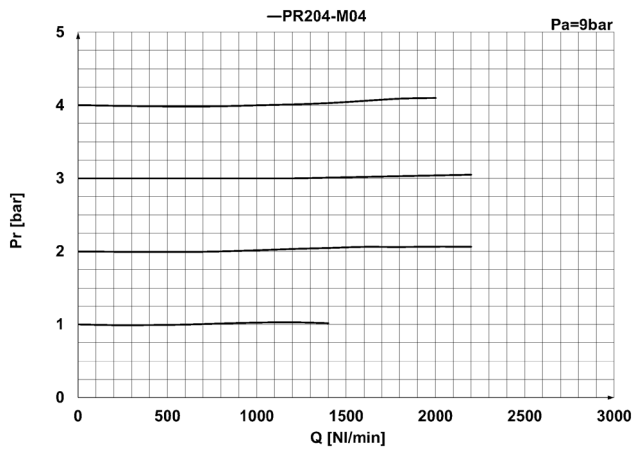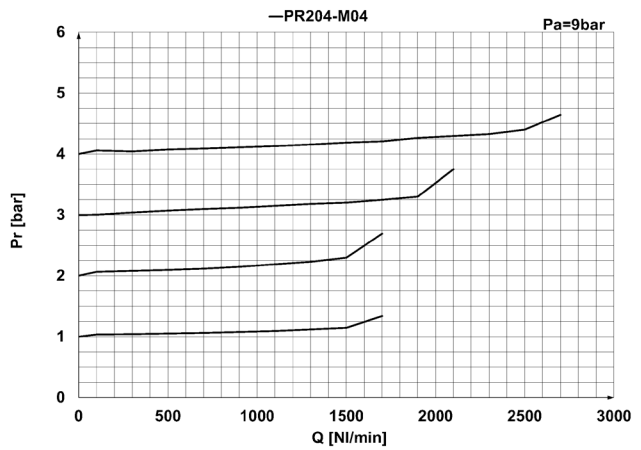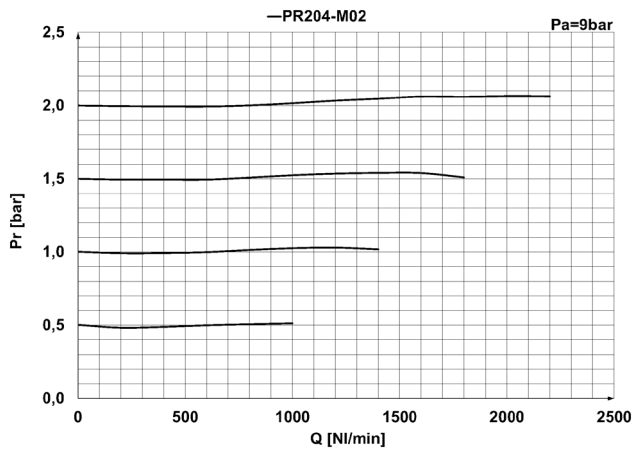Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

EXHAUST FLOW
Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

FLOW DIAGRAMS Mod. PR204-M07

Pr = Regulated pressure (bar)
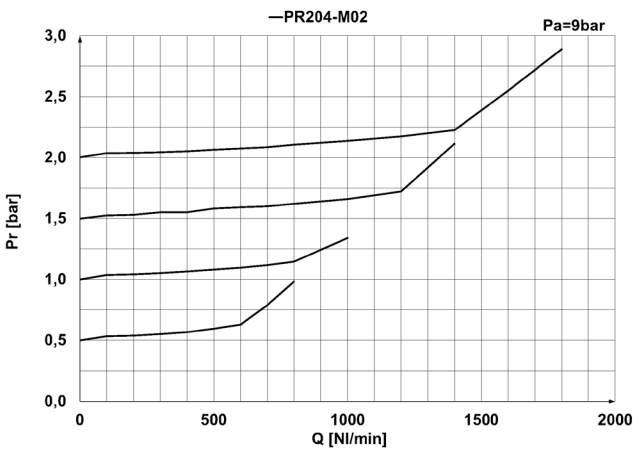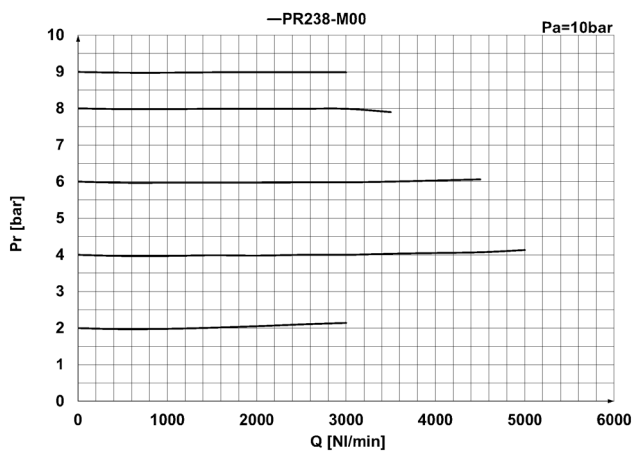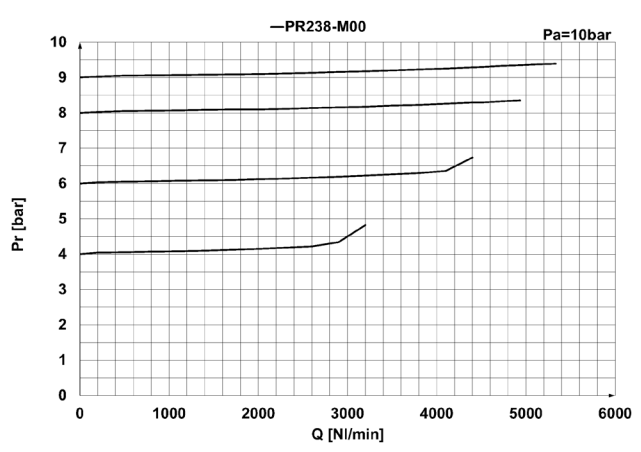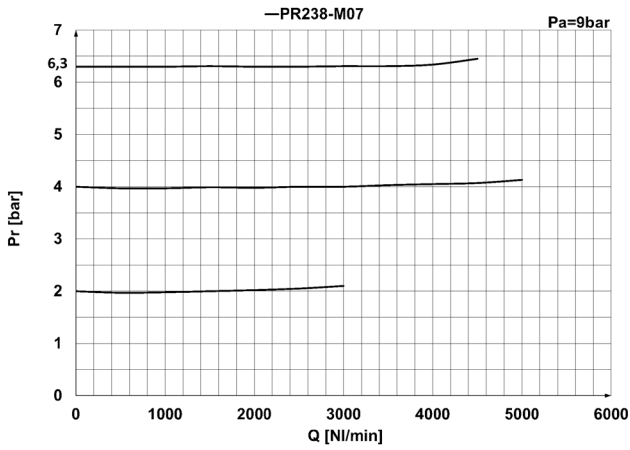Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

EXHAUST FLOW
Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

FLOW DIAGRAMS Mod. PR204-M04

—PR204-M04   Pa=9bar

—PR204-M04   Pa=9bar

EXHAUST FLOW

Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

FLOW DIAGRAMS Mod. PR204-M02

—PR204-M02   Pa=9bar

—PR204-M02   Pa=9bar

EXHAUST FLOW

Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

FLOW DIAGRAMS Mod. PR238-M00

—PR238-M00   Pa=10bar

—PR238-M00   Pa=10bar

EXHAUST FLOW

Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

SERIES PR PRECISION REGULATORS

FLOW DIAGRAMS Mod. PR238-M07

Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

EXHAUST FLOW
Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

FLOW DIAGRAMS Mod. PR238-M04

Pr = Regulated pressure (bar)
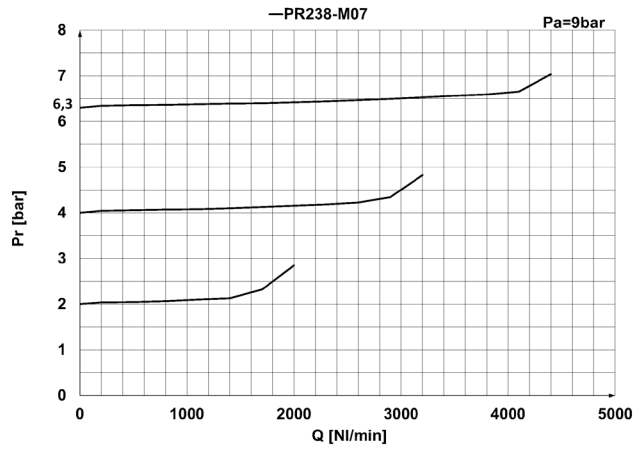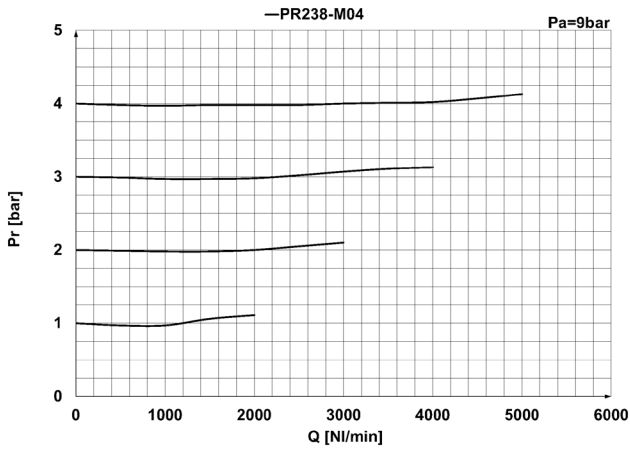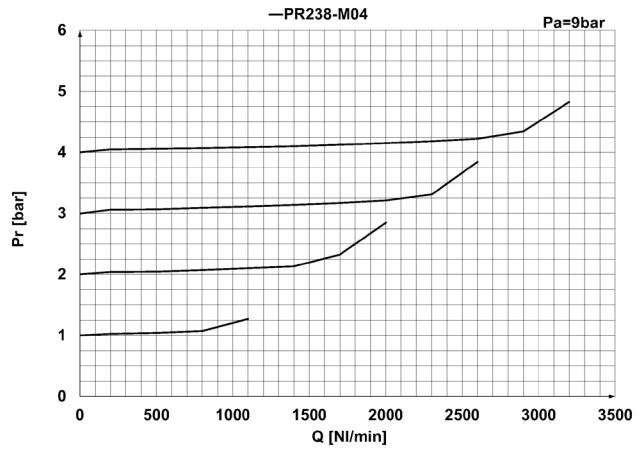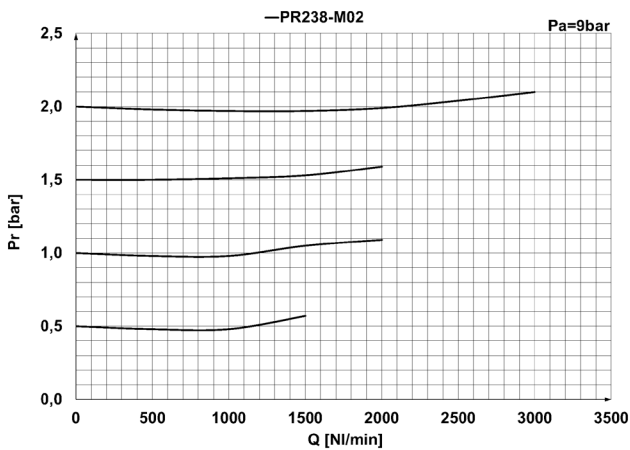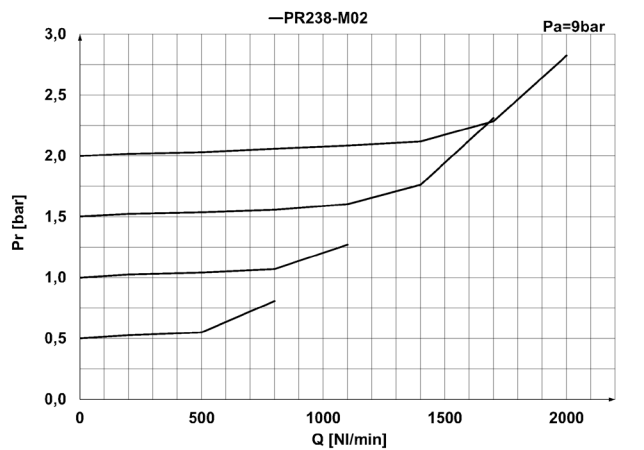Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

EXHAUST FLOW
Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

FLOW DIAGRAMS Mod. PR238-M02

Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)

EXHAUST FLOW
Pr = Regulated pressure (bar)
Q = Flow (Nl/min)
Pa = Inlet pressure (bar)