

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 16N3A12A100

Datasheet creation date: 07/03/2025 17:58

Check the most updated document online 3 click here












TECHNICAL DATA

| Series (mm) | 16 |
|--------------------|--|
| Bore (mm) | 12 |
| Version | N = standard |
| Operation | 2 = double acting, through rod |
| Materials | A = rolled stainless steel stem - stainless steel jacket |
| Construction | A = ring nut V + stem nut U |
| Stroke type | standard |
| Stroke (mm) | 100 |
| Rod seals material | = standard |
| Extended rod (mm) | 0 |



Minicylinders - Series 16 - 23 - 24 - 25

Product code: 16N3A12A100

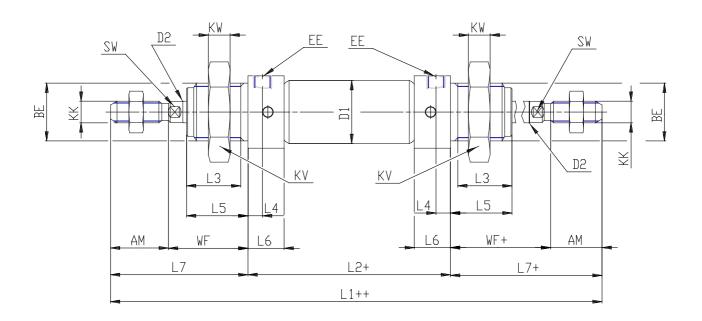

DIMENSIONS

| EW (mm) 12 | |
|----------------------|--|
| KW (mm) 8 | |
| BE M16x1,5 | |
| KK M6x1 | |
| ØCD (mm) 6 | |
| D1 (mm) 14.0 | |
| EE M5 | |
| ØD2 (mm) 6 | |
| L1 (mm) 326.0 | |
| XC (mm) 0 | |
| L2 (mm) 150.0 | |
| AM (mm) 16 | |
| L3 (mm) 15 | |
| L4 (mm) 4.5 | |
| L5 (mm) 17 | |
| L (mm) 9 | |
| WF (mm) 22 | |
| L6 (mm) 9 | |
| L7 (mm) 38 | |
| KV (mm) 24 | |
| SW (mm) 5 | |
| D (mm) 20.5 | |
| D3 (mm) 20 | |