

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 23N2A25A220

Datasheet creation date: 07/03/2025 18:04

Check the most updated document online 3 click here












TECHNICAL DATA

Series (mm)	23	
Bore (mm)	25	
Version	N = standard	
Operation	2 = double acting	
Materials	A = rolled stainless steel stem - stainless steel jacket	
Construction	A = ring nut V + stem nut U	
Stroke type	variable	
Stroke (mm)	220	
Rod seals material	= standard	
Extended rod (mm)	0	



Minicylinders - Series 16 - 23 - 24 - 25

Product code: 23N2A25A220

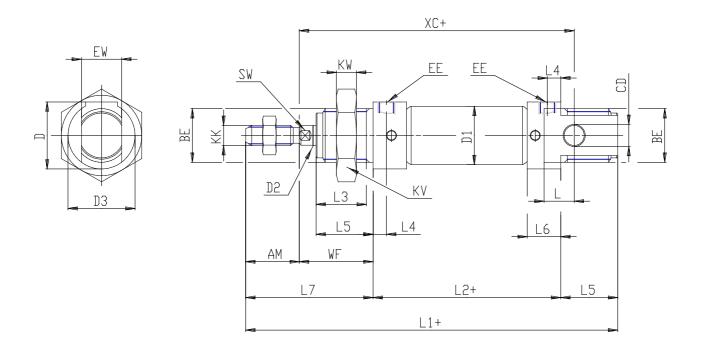

DIMENSIONS

EW (mm) 16 KW (mm) 10 BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 361.5 XC (mm) 324 L2 (mm) 289.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 22 L (mm) 22 L (mm) 22 L (mm) 3.0 L5 (mm) 20 L4 (mm) 4.0 L5 (mm) 22 L (mm) 50		
BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 361.5 XC (mm) 224 L2 (mm) 289.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	EW (mm)	16
KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 361.5 XC (mm) 289.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	KW (mm)	10
ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 361.5 XC (mm) 324 L2 (mm) 289.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	BE	M22x1,5
D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 361.5 XC (mm) 324 L2 (mm) 289.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	KK	M10x1,25
EE G1/8 ØD2 (mm) 10 L1 (mm) 361.5 XC (mm) 324 L2 (mm) 289.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	ØCD (mm)	8
ØD2 (mm) 10 L1 (mm) 361.5 XC (mm) 324 L2 (mm) 289.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	D1 (mm)	27.0
L1 (mm) 361.5 XC (mm) 324 L2 (mm) 289.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	EE	G1/8
XC (mm) 324 L2 (mm) 289.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	ØD2 (mm)	10
L2 (mm) 289.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	L1 (mm)	361.5
AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	XC (mm)	324
L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	L2 (mm)	289.5
L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	AM (mm)	22
L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16	L3 (mm)	20
L (mm) 12 WF (mm) 28 L6 (mm) 16	L4 (mm)	8.0
WF (mm) 28 L6 (mm) 16	L5 (mm)	22
L6 (mm) 16	L (mm)	12
	WF (mm)	28
L7 (mm) 50	L6 (mm)	16
	L7 (mm)	50
KV (mm) 32	KV (mm)	32
SW (mm) 9	SW (mm)	9
D (mm) 27.0	D (mm)	27.0
D3 (mm) 27	D3 (mm)	27