

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 23N2A25A250

Datasheet creation date: 07/03/2025 18:04

Check the most updated document online 3 click here












TECHNICAL DATA

Series (mm)	23
Bore (mm)	25
Version	N = standard
Operation	2 = double acting
Materials	A = rolled stainless steel stem - stainless steel jacket
Construction	A = ring nut V + stem nut U
Stroke type	standard
Stroke (mm)	250
Rod seals material	= standard
Extended rod (mm)	0



Minicylinders - Series 16 - 23 - 24 - 25

Product code: 23N2A25A250

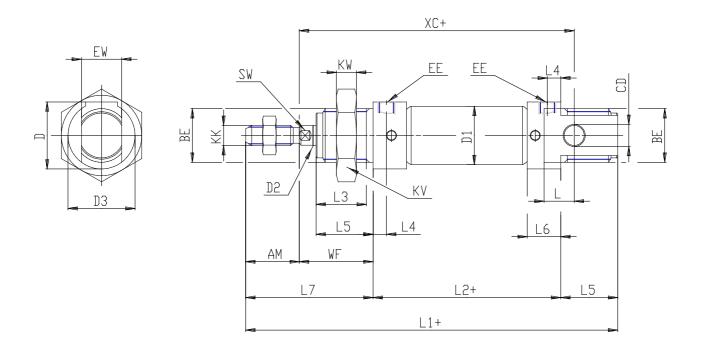

DIMENSIONS

EW (mm) 16 KW (mm) 10 BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 391.5 XC (mm) 354 L2 (mm) 319.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 391.5 XC (mm) 354 L2 (mm) 319.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 391.5 XC (mm) 354 L2 (mm) 319.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 391.5 XC (mm) 354 L2 (mm) 319.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 391.5 XC (mm) 354 L2 (mm) 319.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
EE G1/8 ØD2 (mm) 10 L1 (mm) 391.5 XC (mm) 354 L2 (mm) 319.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
ØD2 (mm) 10 L1 (mm) 391.5 XC (mm) 354 L2 (mm) 319.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
L1 (mm) 391.5 XC (mm) 354 L2 (mm) 319.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
XC (mm) 354 L2 (mm) 319.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
L2 (mm) 319.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
L4 (mm) 8.0 L5 (mm) 22
L5 (mm) 22
L (mm) 12
WF (mm) 28
L6 (mm) 16
L7 (mm) 50
KV (mm) 32
SW (mm) 9
D (mm) 27.0
D3 (mm) 27