

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N1A16A016

Datasheet creation date: 07/03/2025 18:05

Check the most updated document online 3 click here












TECHNICAL DATA

Series (mm)	24
Bore (mm)	16
Version	N = standard
Operation	1 = single effect, front spring
Materials	A = rolled stainless steel stem - stainless steel jacket
Construction	A = ring nut V + stem nut U
Stroke type	variable
Stroke (mm)	16
Rod seals material	= standard
Extended rod (mm)	0

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N1A16A016

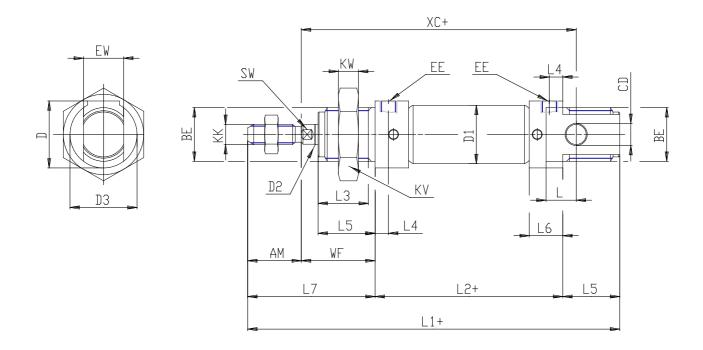

DIMENSIONS

KW (mm) 8 BE M16x1,5 KK M6x1 ØCD (mm) 6 D1 (mm) 18.0 EE M5 ØD2 (mm) 6 L1 (mm) 127.0 XC (mm) 98 L2 (mm) 72.0 AM (mm) 16 L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	EVA! (mame)	12
BE M16x1,5 KK M6x1 ØCD (mm) 6 D1 (mm) 18.0 EE M5 ØD2 (mm) 6 L1 (mm) 127.0 XC (mm) 98 L2 (mm) 72.0 AM (mm) 16 L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	EW (mm)	·-
KK M6x1 ØCD (mm) 6 D1 (mm) 18.0 EE M5 ØD2 (mm) 6 L1 (mm) 127.0 XC (mm) 98 L2 (mm) 72.0 AM (mm) 16 L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	KW (mm)	8
ØCD (mm) 6 D1 (mm) 18.0 EE M5 ØD2 (mm) 6 L1 (mm) 127.0 XC (mm) 98 L2 (mm) 72.0 AM (mm) 16 L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	BE	M16x1,5
D1 (mm) 18.0 EE M5 ØD2 (mm) 6 L1 (mm) 127.0 XC (mm) 98 L2 (mm) 72.0 AM (mm) 16 L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	KK	M6x1
EE M5 ØD2 (mm) 6 L1 (mm) 127.0 XC (mm) 98 L2 (mm) 72.0 AM (mm) 16 L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	ØCD (mm)	6
ØD2 (mm) 6 L1 (mm) 127.0 XC (mm) 98 L2 (mm) 72.0 AM (mm) 16 L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	D1 (mm)	18.0
L1 (mm) 127.0 XC (mm) 98 L2 (mm) 72.0 AM (mm) 16 L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 38 KV (mm) 5 D (mm) 20.5	EE	M5
XC (mm) 98 L2 (mm) 72.0 AM (mm) 16 L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	ØD2 (mm)	6
L2 (mm) 72.0 AM (mm) 16 L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	L1 (mm)	127.0
AM (mm) 16 L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	XC (mm)	98
L3 (mm) 15 L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	L2 (mm)	72.0
L4 (mm) 4.0 L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	AM (mm)	16
L5 (mm) 17 L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	L3 (mm)	15
L (mm) 9 WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	L4 (mm)	4.0
WF (mm) 22 L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	L5 (mm)	17
L6 (mm) 10 L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	L (mm)	9
L7 (mm) 38 KV (mm) 24 SW (mm) 5 D (mm) 20.5	WF (mm)	22
KV (mm) 24 SW (mm) 5 D (mm) 20.5	L6 (mm)	10
SW (mm) 5 D (mm) 20.5	L7 (mm)	38
D (mm) 20.5	KV (mm)	24
	SW (mm)	5
D3 (mm) 20	D (mm)	20.5
20 ()	D3 (mm)	20