

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N1A25A030

Datasheet creation date: 07/03/2025 18:20

Check the most updated document online 3 click here












TECHNICAL DATA

| Series (mm) | 24 | |
|--------------------|--|--|
| Bore (mm) | 25 | |
| Version | N = standard | |
| Operation | 1 = single effect, front spring | |
| Materials | A = rolled stainless steel stem - stainless steel jacket | |
| Construction | A = ring nut V + stem nut U | |
| Stroke type | variable | |
| Stroke (mm) | 30 | |
| Rod seals material | = standard | |
| Extended rod (mm) | 0 | |

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N1A25A030

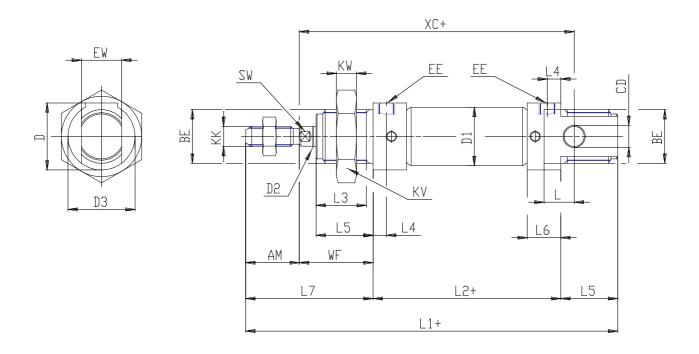

DIMENSIONS

| KW (mm) 10 BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 171.5 XC (mm) 134 L2 (mm) 99.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | | |
|---|----------|----------|
| BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 171.5 XC (mm) 134 L2 (mm) 99.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | EW (mm) | 16 |
| KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 171.5 XC (mm) 134 L2 (mm) 99.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | KW (mm) | 10 |
| ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 171.5 XC (mm) 134 L2 (mm) 99.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | BE | M22x1,5 |
| D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 171.5 XC (mm) 134 L2 (mm) 99.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | KK | M10x1,25 |
| EE G1/8 ØD2 (mm) 10 L1 (mm) 171.5 XC (mm) 134 L2 (mm) 99.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | ØCD (mm) | 8 |
| ØD2 (mm) 10 L1 (mm) 171.5 XC (mm) 134 L2 (mm) 99.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | D1 (mm) | 27.0 |
| L1 (mm) 171.5 XC (mm) 134 L2 (mm) 99.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 12 WF (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | EE | G1/8 |
| XC (mm) 134 L2 (mm) 99.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | ØD2 (mm) | 10 |
| L2 (mm) 99.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | L1 (mm) | 171.5 |
| AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | XC (mm) | 134 |
| L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | L2 (mm) | 99.5 |
| L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | AM (mm) | 22 |
| L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | L3 (mm) | 20 |
| L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | L4 (mm) | 8.0 |
| WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | L5 (mm) | 22 |
| L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | L (mm) | 12 |
| L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 | WF (mm) | 28 |
| KV (mm) 32 SW (mm) 9 D (mm) 27.0 | L6 (mm) | 16 |
| SW (mm) 9 D (mm) 27.0 | L7 (mm) | 50 |
| D (mm) 27.0 | KV (mm) | 32 |
| , | SW (mm) | 9 |
| D3 (mm) 27 | D (mm) | 27.0 |
| , | D3 (mm) | 27 |