

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N1A25A050

Datasheet creation date: 07/03/2025 18:20

Check the most updated document online 3 click here












TECHNICAL DATA

Series (mm)	24
Bore (mm)	25
Version	N = standard
Operation	1 = single effect, front spring
Materials	A = rolled stainless steel stem - stainless steel jacket
Construction	A = ring nut V + stem nut U
Stroke type	standard
Stroke (mm)	50
Rod seals material	= standard
Extended rod (mm)	0

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N1A25A050

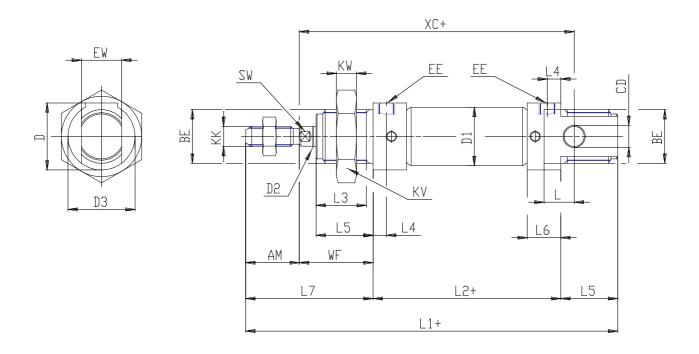

DIMENSIONS

EW (mm) 16 KW (mm) 10 BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 191.5 XC (mm) 154 L2 (mm) 119.5
BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 191.5 XC (mm) 154 L2 (mm) 119.5
KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 191.5 XC (mm) 154 L2 (mm) 119.5
ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 191.5 XC (mm) 154 L2 (mm) 119.5
D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 191.5 XC (mm) 154 L2 (mm) 119.5
EE G1/8 ØD2 (mm) 10 L1 (mm) 191.5 XC (mm) 154 L2 (mm) 119.5
ØD2 (mm) 10 L1 (mm) 191.5 XC (mm) 154 L2 (mm) 119.5
L1 (mm) 191.5 XC (mm) 154 L2 (mm) 119.5
XC (mm) 154 L2 (mm) 119.5
L2 (mm) 119.5
()
AM (mm) 22
L3 (mm) 20
L4 (mm) 8.0
L5 (mm) 22
L (mm) 12
WF (mm) 28
L6 (mm) 16
L7 (mm) 50
KV (mm) 32
SW (mm) 9
D (mm) 27.0
D3 (mm) 27