

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N1A32A010

Datasheet creation date: 07/03/2025 18:30

Check the most updated document online 3 click here












TECHNICAL DATA

Series (mm)	24
Bore (mm)	32
Version	N = standard
Operation	1 = single effect, front spring
Materials	A = rolled stainless steel stem - stainless steel jacket
Construction	A = ring nut V + stem nut U
Stroke type	standard
Stroke (mm)	10
Rod seals material	= standard
Extended rod (mm)	0

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N1A32A010

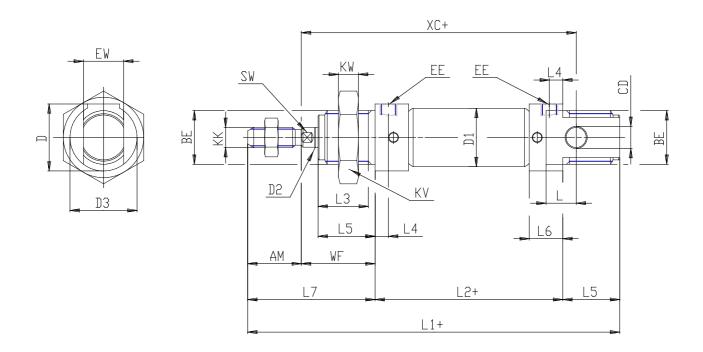

DIMENSIONS

KW (mm) 8 BE M30x1,5 KK M10x1,25 ØCD (mm) 12 D1 (mm) 33.6 EE G1/8 ØD2 (mm) 12 L1 (mm) 151.5 XC (mm) 115 L2 (mm) 79.0 AM (mm) 20 L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5 D3 (mm) 35	EM (mama)	26
BE M30x1,5 KK M10x1,25 ØCD (mm) 12 D1 (mm) 33.6 EE G1/8 ØD2 (mm) 12 L1 (mm) 151.5 XC (mm) 115 L2 (mm) 79.0 AM (mm) 20 L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	EW (mm)	
KK M10x1,25 ØCD (mm) 12 D1 (mm) 33.6 EE G1/8 ØD2 (mm) 12 L1 (mm) 151.5 XC (mm) 115 L2 (mm) 79.0 AM (mm) 20 L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5		
ØCD (mm) 12 D1 (mm) 33.6 EE G1/8 ØD2 (mm) 12 L1 (mm) 151.5 XC (mm) 115 L2 (mm) 79.0 AM (mm) 20 L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	BE	M30x1,5
D1 (mm) 33.6 EE G1/8 ØD2 (mm) 12 L1 (mm) 151.5 XC (mm) 115 L2 (mm) 79.0 AM (mm) 20 L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	KK	M10x1,25
EE G1/8 ØD2 (mm) 12 L1 (mm) 151.5 XC (mm) 115 L2 (mm) 79.0 AM (mm) 20 L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	ØCD (mm)	12
ØD2 (mm) 12 L1 (mm) 151.5 XC (mm) 115 L2 (mm) 79.0 AM (mm) 20 L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	D1 (mm)	33.6
L1 (mm) 151.5 XC (mm) 115 L2 (mm) 79.0 AM (mm) 20 L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 12 WF (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	EE	G1/8
XC (mm) 115 L2 (mm) 79.0 AM (mm) 20 L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	ØD2 (mm)	12
L2 (mm) 79.0 AM (mm) 20 L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	L1 (mm)	151.5
AM (mm) 20 L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	XC (mm)	115
L3 (mm) 19 L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	L2 (mm)	79.0
L4 (mm) 7.5 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	AM (mm)	20
L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	L3 (mm)	19
L (mm) 12 WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	L4 (mm)	7.5
WF (mm) 28 L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	L5 (mm)	22
L6 (mm) 15 L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	L (mm)	12
L7 (mm) 48 KV (mm) 0 SW (mm) 10 D (mm) 36.5	WF (mm)	28
KV (mm) 0 SW (mm) 10 D (mm) 36.5	L6 (mm)	15
SW (mm) 10 D (mm) 36.5	L7 (mm)	48
D (mm) 36.5	KV (mm)	0
	SW (mm)	10
D3 (mm) 35	D (mm)	36.5
	D3 (mm)	35