

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N2A25A435

Datasheet creation date: 07/03/2025 18:25

Check the most updated document online 3 click here












TECHNICAL DATA

Series (mm)	24
Bore (mm)	25
Version	N = standard
Operation	2 = double acting
Materials	A = rolled stainless steel stem - stainless steel jacket
Construction	A = ring nut V + stem nut U
Stroke type	variable
Stroke (mm)	435
Rod seals material	= standard
Extended rod (mm)	0

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N2A25A435

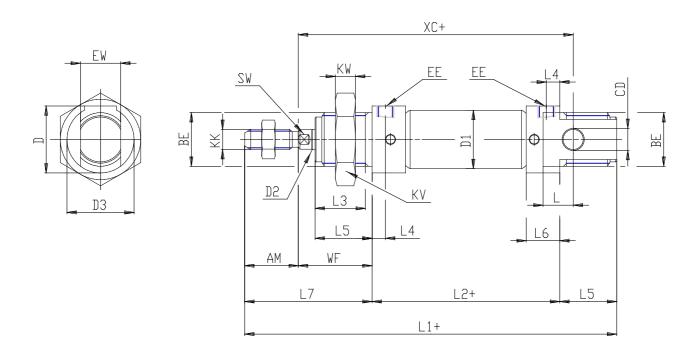

DIMENSIONS

EW (mm) 16 KW (mm) 10 BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 576.5 XC (mm) 539 L2 (mm) 504.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 12 WF (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0 D3 (mm) 27		
BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 576.5 XC (mm) 539 L2 (mm) 504.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	EW (mm)	16
KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 576.5 XC (mm) 539 L2 (mm) 504.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	KW (mm)	10
ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 576.5 XC (mm) 539 L2 (mm) 504.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	BE	M22x1,5
D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 576.5 XC (mm) 539 L2 (mm) 504.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	KK	M10x1,25
EE G1/8 ØD2 (mm) 10 L1 (mm) 576.5 XC (mm) 539 L2 (mm) 504.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	ØCD (mm)	8
ØD2 (mm) 10 L1 (mm) 576.5 XC (mm) 539 L2 (mm) 504.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	D1 (mm)	27.0
L1 (mm) 576.5 XC (mm) 539 L2 (mm) 504.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 12 WF (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	EE	G1/8
XC (mm) 539 L2 (mm) 504.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	ØD2 (mm)	10
L2 (mm) 504.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	L1 (mm)	576.5
AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	XC (mm)	539
L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	L2 (mm)	504.5
L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	AM (mm)	22
L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	L3 (mm)	20
L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	L4 (mm)	8.0
WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	L5 (mm)	22
L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	L (mm)	12
L7 (mm) 50 KV (mm) 32 SW (mm) 9 D (mm) 27.0	WF (mm)	28
KV (mm) 32 SW (mm) 9 D (mm) 27.0	L6 (mm)	16
SW (mm) 9 D (mm) 27.0	L7 (mm)	50
D (mm) 27.0	KV (mm)	32
,	SW (mm)	9
D3 (mm) 27	D (mm)	27.0
	D3 (mm)	27