

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N2A25A555

Datasheet creation date: 07/03/2025 18:26

Check the most updated document online 3 click here












TECHNICAL DATA

Series (mm)	24	
Bore (mm)	25	
Version	N = standard	
Operation	2 = double acting	
Materials	A = rolled stainless steel stem - stainless steel jacket	
Construction	A = ring nut V + stem nut U	
Stroke type	variable	
Stroke (mm)	555	
Rod seals material	= standard	
Extended rod (mm)	0	

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N2A25A555

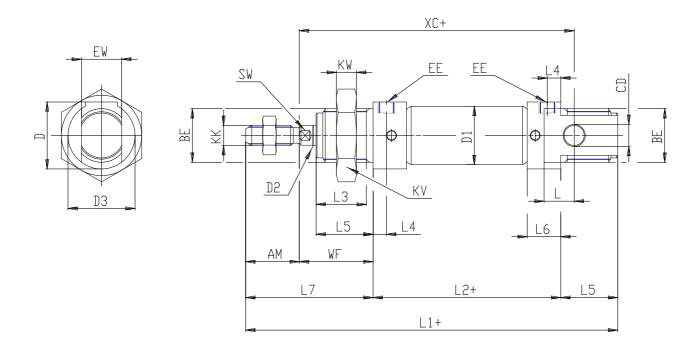

DIMENSIONS

KW (mm) 10 BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 696.5 XC (mm) 659 L2 (mm) 624.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9		
BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 696.5 XC (mm) 659 L2 (mm) 624.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	EW (mm)	16
KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 696.5 XC (mm) 659 L2 (mm) 624.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	KW (mm)	10
ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 696.5 XC (mm) 659 L2 (mm) 624.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	BE	M22x1,5
D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 696.5 XC (mm) 659 L2 (mm) 624.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	KK	M10x1,25
EE G1/8 ØD2 (mm) 10 L1 (mm) 696.5 XC (mm) 659 L2 (mm) 624.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	ØCD (mm)	8
ØD2 (mm) 10 L1 (mm) 696.5 XC (mm) 659 L2 (mm) 624.5 AM (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	D1 (mm)	27.0
L1 (mm) 696.5 XC (mm) 659 L2 (mm) 624.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	EE	G1/8
XC (mm) 659 L2 (mm) 624.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	ØD2 (mm)	10
L2 (mm) 624.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	L1 (mm)	696.5
AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	XC (mm)	659
L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	L2 (mm)	624.5
L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	AM (mm)	22
L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	L3 (mm)	20
L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	L4 (mm)	8.0
WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	L5 (mm)	22
L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	L (mm)	12
L7 (mm) 50 KV (mm) 32 SW (mm) 9	WF (mm)	28
KV (mm) 32 SW (mm) 9	L6 (mm)	16
SW (mm) 9	L7 (mm)	50
	KV (mm)	32
27.0	SW (mm)	9
ט (mm) בי (mm)	D (mm)	27.0
D3 (mm) 27	D3 (mm)	27