

## Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N2A32A180

Datasheet creation date: 07/03/2025 18:31

Check the most updated document online 3 click here












## TECHNICAL DATA

| Series (mm)        | 24   |
|--------------------|--|
| Bore (mm)          | 32   |
| Version            | N = standard   |
| Operation          | 2 = double acting  |
| Materials          | A = rolled stainless steel stem - stainless steel jacket |
| Construction       | A = ring nut V + stem nut U                              |
| Stroke type        | variable   |
| Stroke (mm)        | 180  |
| Rod seals material | = standard   |
| Extended rod (mm)  | 0  |

## Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N2A32A180

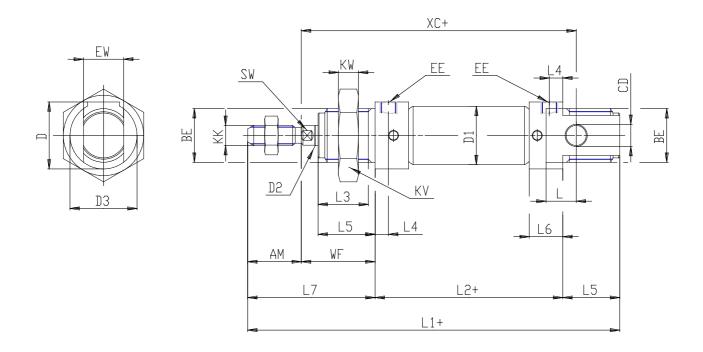

## DIMENSIONS

| EW (mm)  | 26       |
|----------|----------|
| EW (mm)  |          |
| KW (mm)  | 8        |
| BE       | M30x1,5  |
| KK       | M10x1,25 |
| ØCD (mm) | 12       |
| D1 (mm)  | 33.6     |
| EE       | G1/8     |
| ØD2 (mm) | 12       |
| L1 (mm)  | 321.5    |
| XC (mm)  | 285      |
| L2 (mm)  | 249.0    |
| AM (mm)  | 20       |
| L3 (mm)  | 19       |
| L4 (mm)  | 7.5      |
| L5 (mm)  | 22       |
| L (mm)   | 12       |
| WF (mm)  | 28       |
| L6 (mm)  | 15       |
| L7 (mm)  | 48       |
| KV (mm)  | 0        |
| SW (mm)  | 10       |
| D (mm)   | 36.5     |
| D3 (mm)  | 35       |