

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 25N2A25A010

Datasheet creation date: 07/03/2025 18:43

Check the most updated document online 3 click here












TECHNICAL DATA

Series (mm)	25
Bore (mm)	25
Version	N = standard
Operation	2 = double acting
Materials	A = rolled stainless steel stem - stainless steel jacket
Construction	A = ring nut V + stem nut U
Stroke type	standard
Stroke (mm)	10
Rod seals material	= standard
Extended rod (mm)	0

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 25N2A25A010

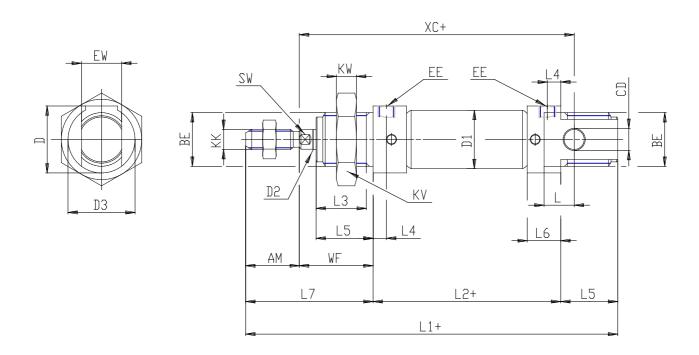

DIMENSIONS

EW (mm) 16 KW (mm) 10 BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 151.5 XC (mm) 114 L2 (mm) 79.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32 SW (mm) 9	Г	
BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 151.5 XC (mm) 114 L2 (mm) 79.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	EW (mm)	16
KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 151.5 XC (mm) 114 L2 (mm) 79.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	KW (mm)	10
ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 151.5 XC (mm) 114 L2 (mm) 79.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	BE	M22x1,5
D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 151.5 XC (mm) 114 L2 (mm) 79.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	KK	M10x1,25
EE G1/8 ØD2 (mm) 10 L1 (mm) 151.5 XC (mm) 114 L2 (mm) 79.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	ØCD (mm)	8
ØD2 (mm) 10 L1 (mm) 151.5 XC (mm) 114 L2 (mm) 79.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	D1 (mm)	27.0
L1 (mm) 151.5 XC (mm) 114 L2 (mm) 79.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	EE	G1/8
XC (mm) 114 L2 (mm) 79.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	ØD2 (mm)	10
L2 (mm) 79.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	L1 (mm)	151.5
AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	XC (mm)	114
L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	L2 (mm)	79.5
L4 (mm) 8.0 L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	AM (mm)	22
L5 (mm) 22 L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	L3 (mm)	20
L (mm) 12 WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	L4 (mm)	8.0
WF (mm) 28 L6 (mm) 16 L7 (mm) 50 KV (mm) 32	L5 (mm)	22
L6 (mm) 16 L7 (mm) 50 KV (mm) 32	L (mm)	12
L7 (mm) 50 KV (mm) 32	WF (mm)	28
KV (mm) 32	L6 (mm)	16
	L7 (mm)	50
SW (mm) 9	KV (mm)	32
	SW (mm)	9
D (mm) 27.0	D (mm)	27.0
D3 (mm) 27	D3 (mm)	27