

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 25N2A25A420V

Datasheet creation date: 07/03/2025 18:50

Check the most updated document online 3 click here












TECHNICAL DATA

Series (mm)	25
Bore (mm)	25
Version	N = standard
Operation	2 = double acting
Materials	A = rolled stainless steel stem - stainless steel jacket
Construction	A = ring nut V + stem nut U
Stroke type	variable
Stroke (mm)	420
Rod seals material	V = FKM rod seal
Extended rod (mm)	0

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 25N2A25A420V

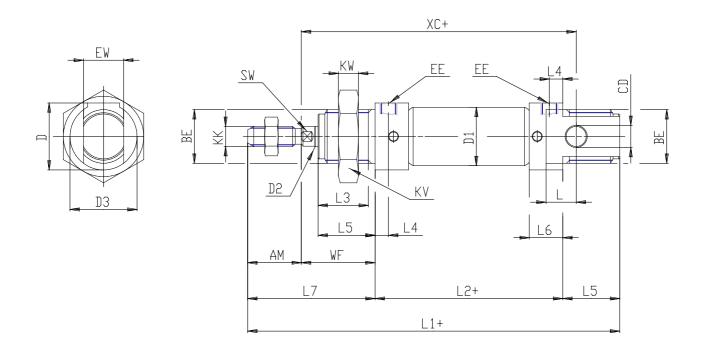

DIMENSIONS

EW (mm) 16 KW (mm) 10 BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 561.5 XC (mm) 524 L2 (mm) 489.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0
BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 561.5 XC (mm) 524 L2 (mm) 489.5 AM (mm) 22 L3 (mm) 20
KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 561.5 XC (mm) 524 L2 (mm) 489.5 AM (mm) 22 L3 (mm) 20
ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 561.5 XC (mm) 524 L2 (mm) 489.5 AM (mm) 22 L3 (mm) 20
D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 561.5 XC (mm) 524 L2 (mm) 489.5 AM (mm) 22 L3 (mm) 20
EE G1/8 ØD2 (mm) 10 L1 (mm) 561.5 XC (mm) 524 L2 (mm) 489.5 AM (mm) 22 L3 (mm) 20
ØD2 (mm) 10 L1 (mm) 561.5 XC (mm) 524 L2 (mm) 489.5 AM (mm) 22 L3 (mm) 20
L1 (mm) 561.5 XC (mm) 524 L2 (mm) 489.5 AM (mm) 22 L3 (mm) 20
XC (mm) 524 L2 (mm) 489.5 AM (mm) 22 L3 (mm) 20
L2 (mm) 489.5 AM (mm) 22 L3 (mm) 20
AM (mm) 22 L3 (mm) 20
L3 (mm) 20
L4 (mm) 8.0
L5 (mm) 22
L (mm) 12
WF (mm) 28
L6 (mm) 16
L7 (mm) 50
KV (mm) 32
SW (mm) 9
D (mm) 27.0
D3 (mm) 27