

# **Compact cylinders - Series 31**

Product code: 31M2A032A055

#### Datasheet creation date: 07/03/2025 20:25

Check the most updated document online 🖄 <u>click here</u>








### TECHNICAL DATA

Series	31
Version	M=male rod thread
Operation	2=double-acting
Diameter (mm)	32
Stroke type	variable
Stroke (mm)	55
Rod seals material	-
Materials	A = rolled stainless steel AISI 303 rod tube profile aluminium
Construction	A = standard



# **Compact cylinders - Series 31**

Product code: 31M2A032A055

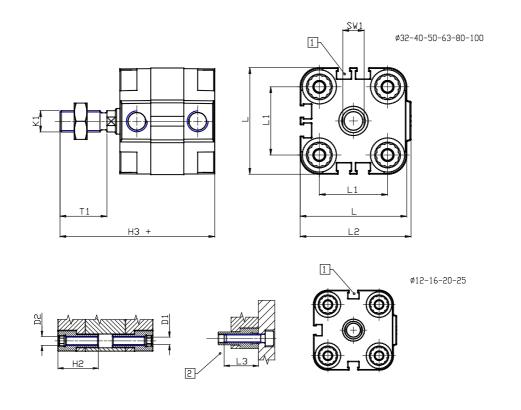

### DIMENSIONS

Ø D (mm)     12       Ø D1 (mm)     5.5       D2     M6       D3     M6       Ø D4 (mm)     5       D5     M5       Ø D8 (mm)     6       D9 (mm)     6       D10 (mm)     17       E1     G1\8       F (mm)     8.0       F1 (mm)     36.5       H (mm)     50.5
D2     M6       D3     M6       Ø D4 (mm)     5       D5     M5       Ø D8 (mm)     6       D9 (mm)     6       D10 (mm)     17       E1     G1\8       F (mm)     8.0       F1 (mm)     36.5       H (mm)     44.5
D3   M6     Ø D4 (mm)   5     D5   M5     Ø D8 (mm)   6     D9 (mm)   6     D10 (mm)   17     E1   G1\8     F (mm)   8.0     F1 (mm)   36.5     H (mm)   44.5
Ø D4 (mm)     5       D5     M5       Ø D8 (mm)     6       D9 (mm)     6       D10 (mm)     17       E1     G1\8       F (mm)     8.0       F1 (mm)     36.5       H (mm)     44.5
D5     M5       Ø D8 (mm)     6       D9 (mm)     6       D10 (mm)     17       E1     G1\8       F (mm)     8.0       F1 (mm)     36.5       H (mm)     44.5
Ø D8 (mm)     6       D9 (mm)     6       D10 (mm)     17       E1     G1\8       F (mm)     8.0       F1 (mm)     36.5       H (mm)     44.5
D9 (mm)     6       D10 (mm)     17       E1     G1\8       F (mm)     8.0       F1 (mm)     36.5       H (mm)     44.5
D10 (mm)   17     E1   G1\8     F (mm)   8.0     F1 (mm)   36.5     H (mm)   44.5
E1 G1\8   F (mm) 8.0   F1 (mm) 36.5   H (mm) 44.5
F (mm)     8.0       F1 (mm)     36.5       H (mm)     44.5
F1 (mm)     36.5       H (mm)     44.5
H (mm) 44.5
H1 (mm) 50.5
H2 (mm) 21.5
<b>K1</b> M10x1,25
L (mm) 50
L1 (mm) 32
L2 (mm) 52.0
L3 (mm) 20
L4 (mm) 19.8
T (mm) 12
T1 (mm) 22

T2 (mm)	4
SW1 (mm)	10