

Compact magnetic cylinders - Series 32

Product code: 32M3A125A210

Datasheet creation date: 08/03/2025 10:19

Check the most updated document online 🖄 <u>click here</u>






TECHNICAL DATA

| Series | 32 |
|----------------------|---|
| Ø cyl. (mm) | 125 |
| Version | M=male rod thread |
| Operation | 3=double-acting through rod |
| Materials | A = anodized aluminium body, end blocks and piston, |
| Construction | A = standard |
| Stroke type | V=variable |
| Stroke Cylinder (mm) | 210 |
| Rod seals material | Standard |
| Rod length (mm) | 0 |



Compact magnetic cylinders - Series 32

Product code: 32M3A125A210

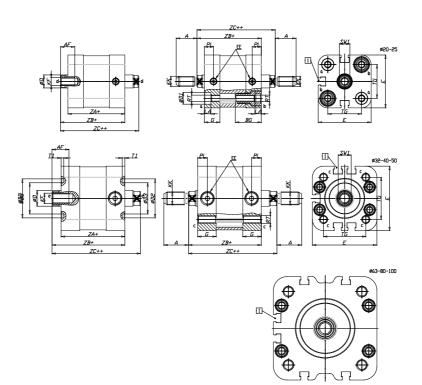

DIMENSIONS

| A (mm) | 40 |
|----------|---------|
| AF (mm) | 25 |
| BG (mm) | 20.0 |
| G (mm) | 20 |
| Ø (mm) | 25 |
| Ø (mm) | 0 |
| D2 (mm) | 60 |
| D3 (mm) | 50 |
| D4 (mm) | 12 |
| D5 (mm) | 12 |
| D6 (mm) | 0 |
| D7 | M10 |
| D8 (mm) | 10 |
| E (mm) | 134.6 |
| EE | G1\4 |
| H (mm) | 14 |
| KF | M16 |
| кк | M20x1,5 |
| LA (mm) | 8 |
| L4 (mm) | 80 |
| PL (mm) | 10.5 |
| RT | M10 |
| SW1 (mm) | 22 |

| T1 (mm) | 4 |
|---------|-------|
| T2 (mm) | 4 |
| T3 (mm) | 10.5 |
| TG (mm) | 110.0 |
| ZA (mm) | 81.0 |
| ZB (mm) | 92.0 |
| ZC (mm) | 103 |