

Pneumatically and electropneumatically operated valves - Series 8

Product code: 810C3104-F131Y-NPE2CC014

Datasheet creation date: 10/03/2025 12:02

Check the most updated document online [click here](#)




TECHNICAL DATA

| | |
|------------------------------------|---|
| Series | 8 |
| Size | 10 = Size 1 |
| Body design | C3 = valve with aluminium body threaded connections |
| Number of ways - Function | 1 = 2/2 NC |
| Pneumatic connections | 04= G1/8 |
| Orifice diameter | F1= 5.0mm (T1) |
| Seal material | 3 = FKM |
| Body material | 1= aluminium |
| Manual override | Y = provided monostable |
| Mounting accessories | N = not provided |
| Options | PE = electropilot with external piloting |
| Electrical connection | 2C = KN 90° type + protection + led - only for size 1 |
| Voltage - power consumption | C014= 24V DC 1.3/0.25 |
| Version | = Standard |

Pneumatically and electropneumatically operated valves - Series 8

Product code: 810C3104-F131Y-NPE2CC014

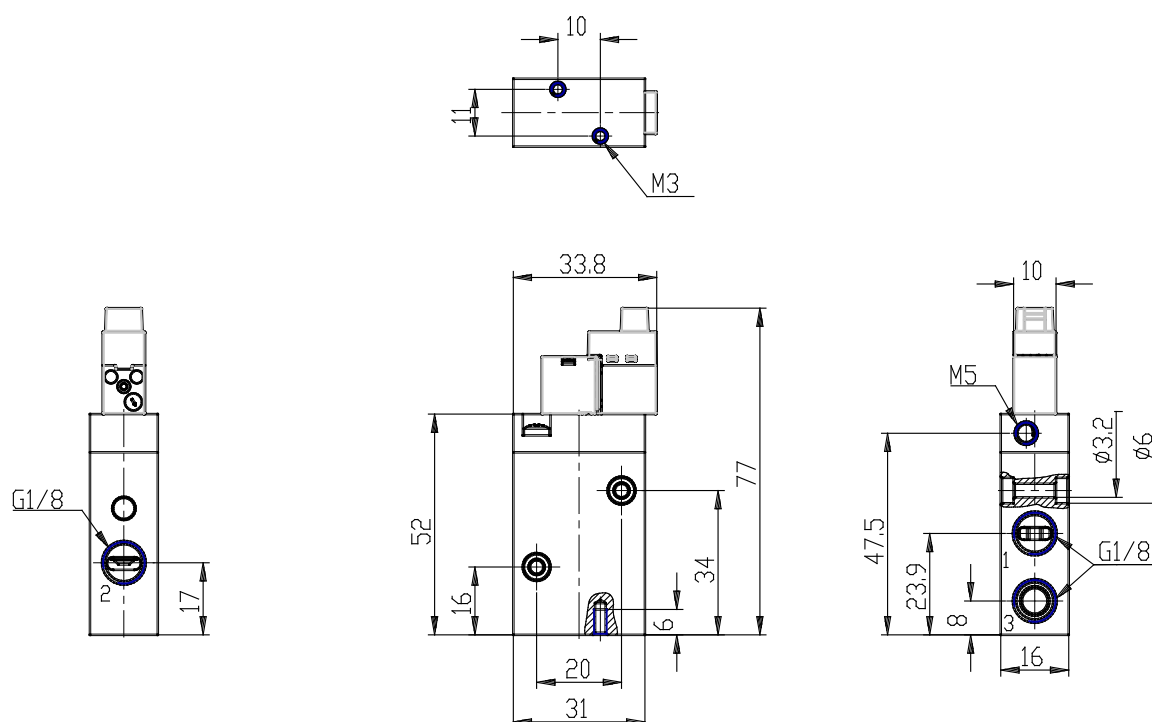

DIMENSIONS

| | |
|------------------------------------|---|
| Series | 8 |
| Size | 10 = Size 1 |
| Body design | C3 = valve with aluminium body threaded connections |
| Number of ways - Function | 1 = 2/2 NC |
| Pneumatic connections | 04= G1/8 |
| Orifice diameter | F1= 5.0mm (T1) |
| Seal material | 3 = FKM |
| Body material | 1= aluminium |
| Manual override | Y = provided monostable |
| Mounting accessories | N = not provided |
| Options | PE = electropilot with external piloting |
| Electrical connection | 2C = KN 90° type + protection + led - only for size 1 |
| Voltage - power consumption | C014= 24V DC 1.3/0.25 |
| Version | = Standard |