

Stainless steel Cylinders (DIN/ISO 6431 - Series 90

Product code: 90M2A032A0125

Datasheet creation date: 07/03/2025 17:14

Check the most updated document online 3 click here










TECHNICAL DATA


Series	90
Diameter (mm)	32
Version	M = standard magnetic
Operation	2 = double-acting (front and rear cush.)
Materials	A = stainless steel AISI 316 (SS 2343), joints NBR
Construction	A = standard
Stroke type	standard
Stroke (mm)	125
rod seals viton	-



Stainless steel Cylinders (DIN/ISO 6431 - Series 90

Product code: 90M2A032A0125

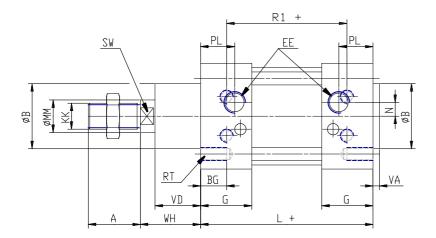



DIMENSIONS

A (mm) 22 B (mm) 30 BG (mm) 16 BF (mm) 10 E (mm) 45 EE G1\8 G (mm) 28.0 KK M10x1,25 L (mm) 94 MM (mm) 12 N (mm) 4.5 PL (mm) 14 RT (mm) M6
BG (mm) 16 BF (mm) 10 E (mm) 45 EE G1\8 G (mm) 28.0 KK M10x1,25 L (mm) 94 MM (mm) 12 N (mm) 4.5 PL (mm) 14
BF (mm) 10 E (mm) 45 EE G1\8 G (mm) 28.0 KK M10x1,25 L (mm) 94 MM (mm) 12 N (mm) 4.5 PL (mm) 14
E (mm) 45 EE G1\8 G (mm) 28.0 KK M10x1,25 L (mm) 94 MM (mm) 12 N (mm) 4.5 PL (mm) 14
EE G1\8 G (mm) 28.0 KK M10x1,25 L (mm) 94 MM (mm) 12 N (mm) 4.5 PL (mm) 14
G (mm) 28.0 KK M10x1,25 L (mm) 94 MM (mm) 12 N (mm) 4.5 PL (mm) 14
KK M10x1,25 L (mm) 94 MM (mm) 12 N (mm) 4.5 PL (mm) 14
L (mm) 94 MM (mm) 12 N (mm) 4.5 PL (mm) 14
MM (mm) 12 N (mm) 4.5 PL (mm) 14
N (mm) 4.5 PL (mm) 14
PL (mm) 14
1 1
RT (mm) M6
Ter (mm)
R1 (mm) 64
R2 (mm) 16
SW (mm) 10
T (mm) M5
TG (mm) 32.5
VA (mm) 4
VD (mm) 20
WH (mm) 26
ZM (mm) 146