

Direct acting solenoid valves - Series K8

Product code: K8000-303-K21

Datasheet creation date: 10/03/2025 11:45

Check the most updated document online 3 click here








TECHNICAL DATA

| Series | K8 |
|-----------------------------|-----------------------------------|
| Body design | 0 = single valve |
| Body design | 00 = Valve without seat |
| Fixing | None |
| Number of ways - Function | 3 = 3/2 way - NC |
| Sealing material | 0 = poppet, FKM seals |
| Orifice diameter | 3 = Ø 0.5 mm (max pressure 7 bar) |
| Materials | K= brass orifice |
| Electric connection | 2 = pins - 4 mm pitch |
| Voltage - Power consumption | 1 = 6 V DC - 0.6W |
| Options | = standard |



Direct acting solenoid valves - Series K8

Product code: K8000-303-K21

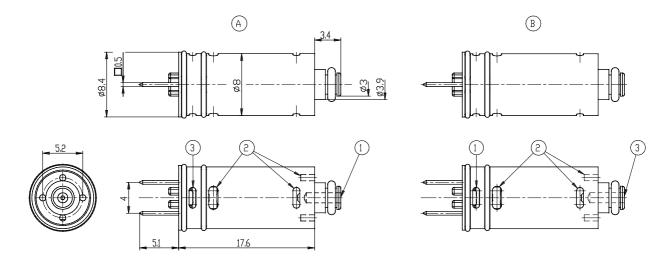

1 = ALIMENTAZIONE / INLET 2 = UTILIZZO / DUTLET 3 = SCARICO / EXHAUST A = VERSIONE 3/2 NC B = VERSIONE 3/2 NA

DIMENSIONS

| Series | K8 |
|-----------------------------|------------------------------|
| Body design | 0 = single valve |
| Body design | 00 = Valve without seat |
| Fixing | None |
| Number of ways - Function | 3 = 3/2 way - NC |
| Sealing material | 0 = poppet, FKM seals |
| Orifice diameter | 3 = Ø 0.5 mm (max pressure 7 |
| | bar) |
| Materials | K= brass orifice |
| Electric connection | 2 = pins - 4 mm pitch |
| Voltage - Power consumption | 1 = 6 V DC - 0.6W |
| Options | = standard |