

Filter-regulators - Series MX

Product code: MX3-1-FR1304-LH

Datasheet creation date: 10/03/2025 01:19

Check the most updated document online 3 click here








TECHNICAL DATA

Series	MX	
Size	3	
PORTS (IN - OUT)	1 = G1	
Filter-regulator	FR	
Filtering element	1 = 5 μm with relieving	
Draining of condensate	3 = automatic drain	
Operating pressure	0 = 0.5 ÷ 10 bar (standard)	
Pressure gauge	4 = with built-in pressure gauge 0-12 and working pressure 0.5 ÷ 10 bar (standard)	
Flow direction	LH = from right to left	



Filter-regulators - Series MX

Product code: MX3-1-FR1304-LH

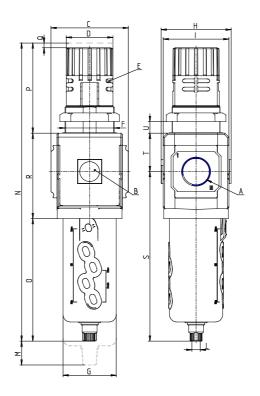

DIMENSIONS

A G1 B (bar) 0-12 bar C (mm) 89.5 D (mm) 54 E (mm) Ø4 E2 (mm) 8.0 F (mm) M57x1.5 G (mm) 61.5 H (mm) 76 L G 1/8 M (mm) 95 N (mm) 345 O (mm) 142 P (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5		
C (mm) 89.5 D (mm) 54 E (mm) Ø4 E2 (mm) 8.0 F (mm) M57x1.5 G (mm) 61.5 H (mm) 81.0 I (mm) 76 L G 1/8 M (mm) 95 N (mm) 345 O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	A	G1
D (mm) 54 E (mm) Ø4 E2 (mm) 8.0 F (mm) M57x1.5 G (mm) 61.5 H (mm) 81.0 I (mm) 76 L G 1/8 M (mm) 95 N (mm) 345 O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	B (bar)	0-12 bar
E (mm) Ø4 E2 (mm) 8.0 F (mm) M57x1.5 G (mm) 61.5 H (mm) 81.0 I (mm) 76 L G 1/8 M (mm) 95 N (mm) 345 O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	C (mm)	89.5
E2 (mm) 8.0 F (mm) M57x1.5 G (mm) 61.5 H (mm) 81.0 I (mm) 76 L G 1/8 M (mm) 95 N (mm) 345 O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	D (mm)	54
F (mm) M57x1.5 G (mm) 61.5 H (mm) 81.0 I (mm) 76 L G 1/8 M (mm) 95 N (mm) 345 O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	E (mm)	Ø4
G (mm) 61.5 H (mm) 81.0 I (mm) 76 L G 1/8 M (mm) 95 N (mm) 345 O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	E2 (mm)	8.0
H (mm) 81.0 I (mm) 76 L G 1/8 M (mm) 95 N (mm) 345 O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	F (mm)	M57x1.5
I (mm) 76 L G 1/8 M (mm) 95 N (mm) 345 O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	G (mm)	61.5
L G 1/8 M (mm) 95 N (mm) 345 O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	H (mm)	81.0
M (mm) 95 N (mm) 345 O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	I (mm)	76
N (mm) 345 O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	L	G 1/8
O (mm) 142 P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	M (mm)	95
P (mm) 104 Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	N (mm)	345
Q (mm) 5 R (mm) 99 S (mm) 196.5 T (mm) 44.5	O (mm)	142
R (mm) 99 S (mm) 196.5 T (mm) 44.5	P (mm)	104
S (mm) 196.5 T (mm) 44.5	Q (mm)	5
T (mm) 44.5	R (mm)	99
	S (mm)	196.5
	T (mm)	44.5
U (mm) 0÷20	U (mm)	0÷20
Weight (kg) 1.3	Weight (kg)	1.3