

## Direct Operated Solenoid Valves with Separation Diaphragm - PDV Series

Product code: PDVC0122-B34GN-M003AC023

Datasheet creation date: 10/03/2025 11:40

Check the most updated document online [click here](#)




### TECHNICAL DATA

<b>Series</b>	PDV
<b>Body execution</b>	C0 = body with interface for subbase
<b>Number of ways - functions</b>	1 = 2/2 way - NC
<b>Pneumatic connections</b>	22 = PDV-type interface, 2-way
<b>Orifice diameter</b>	B3 = $\varnothing$ 1.2 mm
<b>Materials held</b>	4 = EPDM
<b>Body materials</b>	G = PEEK
<b>Manual intervention</b>	N = not foreseen
<b>Fixing</b>	M = fixing screws for metal
<b>Options</b>	00 = none
<b>Electrical connection</b>	3A = DIN EN 175 301-803-C (8 mm)
<b>Voltage - absorbed power</b>	C023 = 24 V DC - 2 W

## Direct Operated Solenoid Valves with Separation Diaphragm - PDV Series

Product code: PDVC0122-B34GN-M003AC023

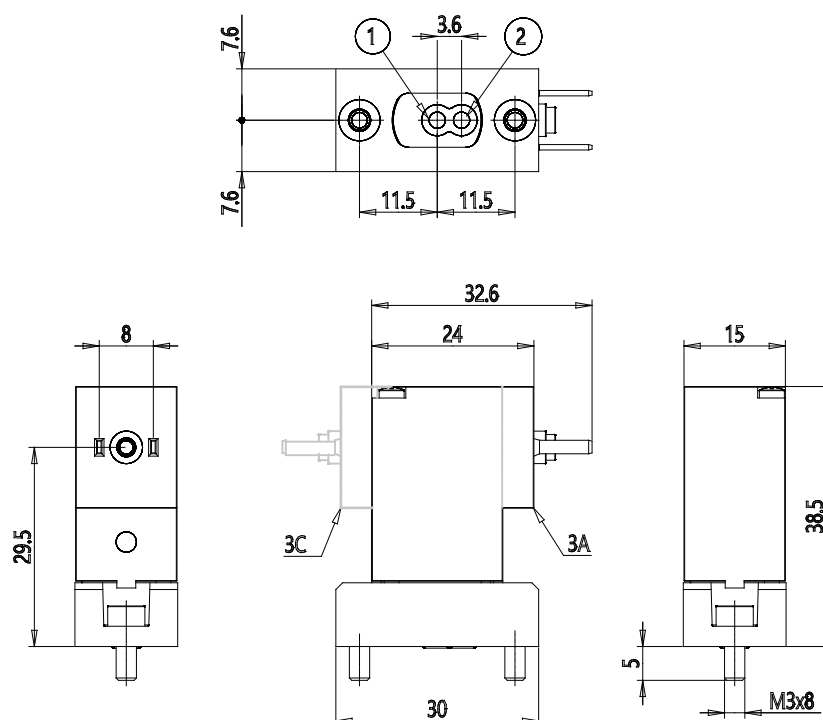

### DIMENSIONS

<b>Series</b>	PDV
<b>Body execution</b>	C0 = body with interface for subbase
<b>Number of ways - functions</b>	1 = 2/2 way - NC
<b>Pneumatic connections</b>	22 = PDV-type interface, 2-way
<b>Orifice diameter</b>	B3 = $\varnothing$ 1.2 mm
<b>Materials held</b>	4 = EPDM
<b>Body materials</b>	G = PEEK
<b>Manual intervention</b>	N = not foreseen
<b>Fixing</b>	M = fixing screws for metal
<b>Options</b>	00 = none
<b>Electrical connection</b>	3A = DIN EN 175 301-803-C (8 mm)
<b>Voltage - absorbed power</b>	C023 = 24 V DC - 2 W