

## Short-stroke cylinders - Series QL

Product code: QLM2A040A075M

#### Datasheet creation date: 09/03/2025 23:18

Check the most updated document online 🖄 <u>click here</u>






#### TECHNICAL DATA

Series	QL
Version	M = Magnetic
Function	2 = double - acting
Materials	A = rolled stainless steel rod - AL profile
Construction type	A = Standard
Diameter (mm)	Ø40
Stroke (mm)	75
Rod	M = Male rod
Certification	= Standard



# Short-stroke cylinders - Series QL

Product code: QLM2A040A075M

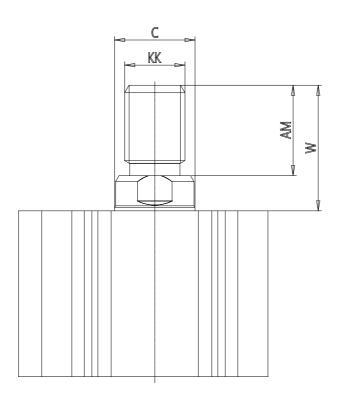

### DIMENSIONS

C (mm) 16   D (mm) 57.0   E (mm) 52.0   G (mm) 39.5   H (mm) 11.0   H1 (mm) 8.0   J M6x1   K (mm) 9.0   L (mm) 7.0   L1 (mm) 13   M1 (mm) 7.5
E (mm) 52.0   G (mm) 39.5   H (mm) 11.0   H1 (mm) 8.0   J M6x1   K (mm) 9.0   L (mm) 7.0   L1 (mm) 17.0   M (mm) 13   M1 (mm) 7.5
G (mm) 39.5   H (mm) 11.0   H1 (mm) 8.0   J M6x1   K (mm) 9.0   L (mm) 7.0   L1 (mm) 17.0   M (mm) 13   M1 (mm) 7.5
H (mm) 11.0   H1 (mm) 8.0   J M6x1   K (mm) 9.0   L (mm) 7.0   L1 (mm) 17.0   M (mm) 13   M1 (mm) 7.5
H1 (mm) 8.0   J M6x1   K (mm) 9.0   L (mm) 7.0   L1 (mm) 17.0   M (mm) 13   M1 (mm) 7.5
J   M6x1     K (mm)   9.0     L (mm)   7.0     L1 (mm)   17.0     M (mm)   13     M1 (mm)   7.5
K (mm) 9.0   L (mm) 7.0   L1 (mm) 17.0   M (mm) 13   M1 (mm) 7.5
L (mm) 7.0 L1 (mm) 17.0 M (mm) 13 M1 (mm) 7.5
L1 (mm)   17.0     M (mm)   13     M1 (mm)   7.5
M (mm)   13     M1 (mm)   7.5
M1 (mm) 7.5
N (mm) 46.5
P M8x1.25
<b>Q</b> G1/8
SW (mm) 14
<b>TG (mm)</b> 40.0
<b>Z (mm)</b> 15
W (mm) 30.5
KK M14x1.5
AM (mm) 23.5