

Short stroke magnetic cylinders - Series QP-QPR

Product code: QP3A050A075

Datasheet creation date: 10/03/2025 00:03

Check the most updated document online 🖄 <u>click here</u>






TECHNICAL DATA

| Series | QP = standard |
|-----------------|-----------------------------|
| Diameter (mm) | 50 |
| Operation | 3=double-acting through rod |
| Materials | A = rolled stainless steel |
| Construction | A = standard |
| Stroke type | N = standard |
| Stroke (mm) | 75 |
| Atex | No Atex |
| Rod lenght (mm) | 0 |



Short stroke magnetic cylinders - Series QP-QPR

Product code: QP3A050A075

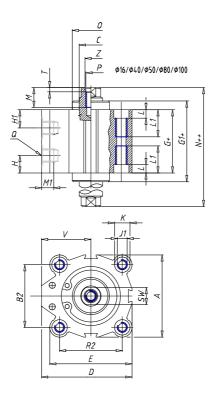

DIMENSIONS

| A (mm) | 64.0 |
|----------|-------|
| B (mm) | - |
| B1 (mm) | - |
| B2 (mm) | 50 |
| ØC (mm) | 16 |
| D (mm) | 72.00 |
| E (mm) | 64.00 |
| G (mm) | 42.2 |
| G1 (mm) | 45.8 |
| H1 (mm) | 11.2 |
| H (mm) | 11.2 |
| J (mm) | 6.5 |
| J1 | M8 |
| K (mm) | 10.5 |
| L (mm) | 6.0 |
| L1 (mm) | 21.0 |
| M (mm) | 13.5 |
| M1 (mm) | 9.0 |
| N (mm) | 54.8 |
| N1 (mm) | - |
| Ø O (mm) | 37.5 |
| Р | M8 |
| Q | G1/4 |

| R (mm) | - |
|-----------|-------|
| R1 (mm) | - |
| R2 (mm) | 50 |
| SW (mm) | 13 |
| T (mm) | 3.5 |
| U (mm) | - |
| V (mm) | 40.00 |
| AA (mm) | 12 |
| BB (mm) | 6.8 |
| Ø CC (mm) | 10.5 |
| Ø DD (mm) | 6.5 |
| EE (mm) | 10.0 |
| FF | M6 |
| LL (mm) | 50.0 |
| MM (mm) | 65.0 |
| NN (mm) | 65 |
| RR (mm) | 50.0 |
| VV (mm) | - |
| Z (mm) | 8.5 |