

<u>erste</u>

Electronic proportional micro regulator - Series K8P

Product code: K8P-L-E522-2R

Datasheet creation date: 10/03/2025 10:39

Check the most updated document online 🖄 <u>click here</u>




TECHNICAL DATA


Series	K8P
Body design	L = Light Sub-base
Working pressure (mm)	E= 0-3 bar
Valve functions (mm)	5= 2 ways NC
COMMAND	2 = 0-10 V DC
Output signal (mm)	2= 0-10 V
Cable lenght (mm)	2R = right angle cable (90 degrees), 2 m



Electronic proportional micro regulator - Series K8P

Product code: K8P-L-E522-2R

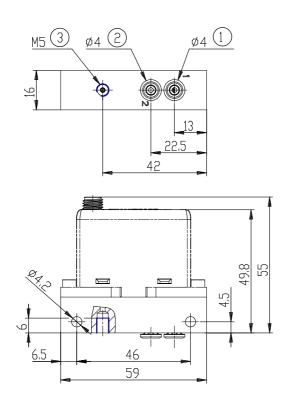



DIMENSIONS

Series	K8P
Body design	L = Light Sub-base
Working pressure (mm)	E= 0-3 bar
Valve functions (mm)	5= 2 ways NC
COMMAND	2 = 0-10 V DC
Output signal (mm)	2= 0-10 V
Cable lenght (mm)	2R = right angle cable (90 degrees),
	2 m