

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N2A25A140

Datasheet creation date: 07/03/2025 18:23

Check the most updated document online 3 click here












TECHNICAL DATA

Series (mm)	24
Bore (mm)	25
Version	N = standard
Operation	2 = double acting
Materials	A = rolled stainless steel stem - stainless steel jacket
Construction	A = ring nut V + stem nut U
Stroke type	variable
Stroke (mm)	140
Rod seals material	= standard
Extended rod (mm)	0

Minicylinders - Series 16 - 23 - 24 - 25

Product code: 24N2A25A140

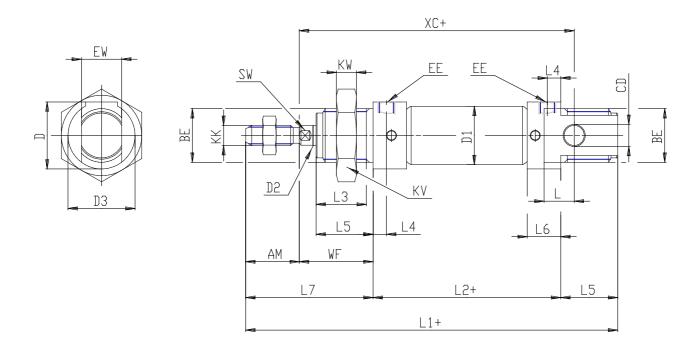

DIMENSIONS

EW (mm) 16 KW (mm) 10 BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 281.5 XC (mm) 244 L2 (mm) 209.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0 L5 (mm) 22
BE M22x1,5 KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 281.5 XC (mm) 244 L2 (mm) 209.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0
KK M10x1,25 ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 281.5 XC (mm) 244 L2 (mm) 209.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0
ØCD (mm) 8 D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 281.5 XC (mm) 244 L2 (mm) 209.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0
D1 (mm) 27.0 EE G1/8 ØD2 (mm) 10 L1 (mm) 281.5 XC (mm) 244 L2 (mm) 209.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0
EE G1/8 ØD2 (mm) 10 L1 (mm) 281.5 XC (mm) 244 L2 (mm) 209.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0
ØD2 (mm) 10 L1 (mm) 281.5 XC (mm) 244 L2 (mm) 209.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0
L1 (mm) 281.5 XC (mm) 244 L2 (mm) 209.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0
XC (mm) 244 L2 (mm) 209.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0
L2 (mm) 209.5 AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0
AM (mm) 22 L3 (mm) 20 L4 (mm) 8.0
L3 (mm) 20 L4 (mm) 8.0
L4 (mm) 8.0
1.5 (mm) 22
22 (IIIII)
L (mm) 12
WF (mm) 28
L6 (mm) 16
L7 (mm) 50
KV (mm) 32
SW (mm) 9
D (mm) 27.0
D3 (mm) 27